


# Topakustik Classic

## 13.5/2.5 M

TOP(A)K(U)S(T)I(K) 


Acoustic panel solutions

The most popular Topakustik types. High sound absorption combined with easy assembly. The grooving remains visible even from a long distance.

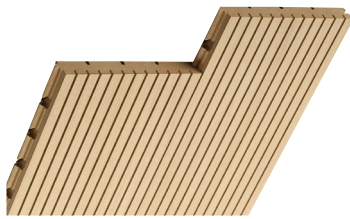

### Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten.



#### Fir knotless (ARIA-Pure)

  
Fir knotless  
16 mm

2480 × 128  
4080 × 128


#### Spruce / White Fir (ARIA-Plus)

  
Spruce / White Fir  
20 mm

4080 × 128

Standard

#### 13.5/2.5 M-9.5%



Golfclub Engelberg, CH | Architect: Matthias Buser, Zürich CH

#### Sound absorption data acc. to ISO 354

##### Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m<sup>3</sup>)

Topakustik AG | Obseestrasse 11 | 6078 Lungern | Schweiz  
T +41 41 679 73 73 | contact@topakustik.ch | www.topakustik.ch  
CHE-101.964.094 MwSt



A+ und FSC Produkte sind gekennzeichnet / A+ and FSC products are marked /  
Les produits A+ et FSC sont étiquetés / Prodotti A+ e FSC sono contrassegnati