


Topakustik Classic

18.5/2.5 M 3D

TOP(A)K(U)S(T)I(K) 



Acoustic panel solutions

These grooves are the ideal solution for standard absorption requirements. Thanks to the interesting 3D optics, your wall or ceiling becomes an eye-catcher.

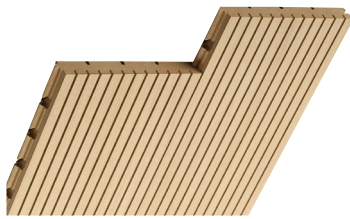

Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten.

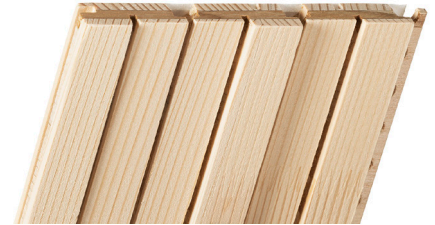

Fir knotless (ARIA-Pure)




Fir knotless
16 mm

Standard

2480 × 128

4080 × 128

18.5/2.5 M 3D-7%



Tecnofil AG Filtertechnik, Gränichen CH | Architect: Tecnofil AG Filtertechnik, Gränichen CH |
Photo: Sibylle Kathriner Fotografie, CH

Sound absorption data acc. to ISO 354

Suspension height:
— approx. 216 mm
- - - approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)

! * During planning, the axial dimension of 21.33 mm must be taken into account.